

Smart Link Conveyor

LC 500 / 1000 / 1500



Description


Edge belt conveyor system with a 500 mm long conveyor segment. The conveyor is used as a connecting element between 2 machines in a production line. The precise rail design allows quick and easy adjustment of the conveyor. The powder coated steel frame ensures process stability and excellent durability.

Features

- _ SMESS Interface
- _ Start / Stop push button

Options

- _ Inspection function 0/1
- _ Adjustable handover speed
- _ Electrical width adjustment
- _ Transport height 850 mm $\pm$ 50 mm
- _ Hinged dust cover 530 mm
- _ Scanner mounting bracket with trigger, topside
- _ Pin Edge Conveyor

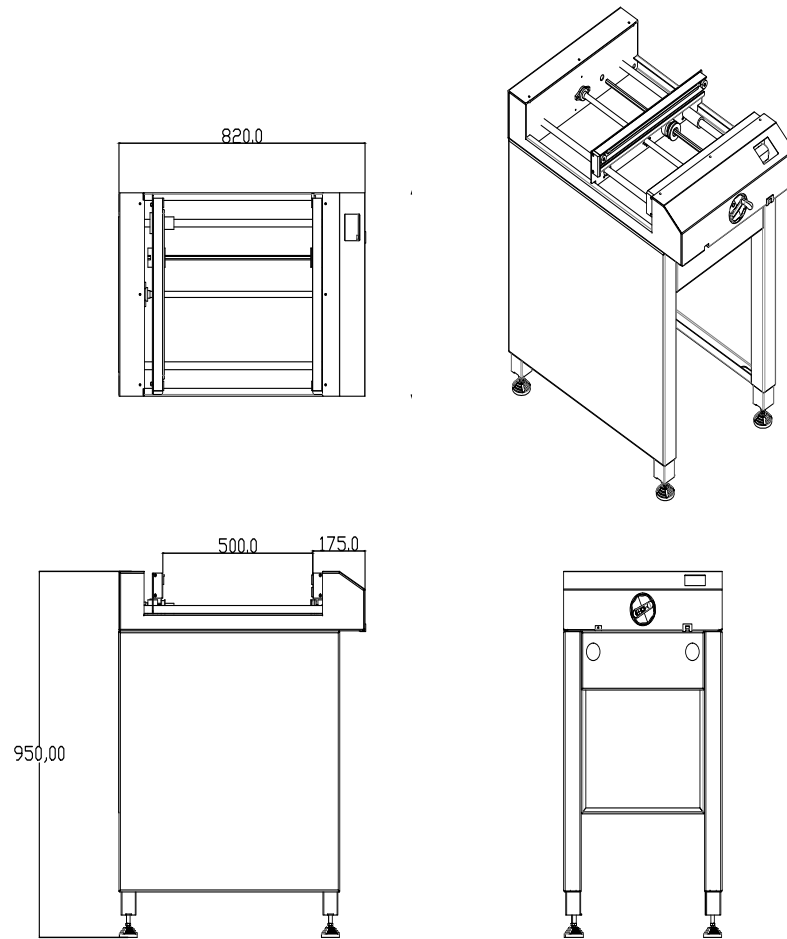

LC 500 / 1000 / 1500

Machine Configuration

Transport height	950 mm $\pm$ 50 mm
Max. transport width	500mm
Interface	SMEMA
Transfer direction	from left to right
Operating side	Front of the machine
Fixed rail	Front of the machine

Panel Dimensions

Panel length	50 to 500 mm
Panel width	50 to 500 mm
Panel thickness	0.8 to 4.5 mm
Component clearance	$\pm$ 75 mm
Panel weight	to 3 kg

Installation Requirements

Power supply	230 V / 115 V, 50 / 60 Hz, $\pm$ 10%
Power supply system	L1 + N + PE
Power consumption	0,07 kW

Machine Description

	LC500	LC1000	LC1500
Length x Width x Height	530 x 820 x 950 mm	1030 x 820 x 950	1530 x 820 x 950
Netto weight	70 kg	mm 110 kg	mm 180 kg
Noise Level	< 75 dB	< 75 dB	< 75 dB



eps worldwide pvt. ltd.

S. No. 145, Garmal, Dhayari, Pune : 411041. INDIA

Tel.: +91-20-24394527 / 24392715 / 24102200

Email : admin@eps-ww.com Web : www.eps-ww.com